

LOUVRE MODEL OVERVIEW
Alumax Opening
Louvred Roof
Systems



Made in Australia

ARCHITECTURAL LOUVRE SYSTEMS

Alumax Louvre Models

“One-size-fits-all” this is not our philosophy.

We have developed our comprehensive range of Opening Louvred Roof Models from our many years of commercial project success. A commonly asked question is, “Which Alumax Model best suits my space?”

Each Alumax Model has a maximum span; this typically means the larger your space is, the larger the louvre blade typically should be. Using this method as a rule of thumb will typically equal fewer support beams and individual bays required to cover your space, equating to less clutter and a higher openness factor to your outdoor space.

Excellent sun, heat & light control Solutions. Alumax Opening Louvred Roofs will reduce unwanted heat entering your building during summer months and allow much-needed warmth & light to enter during the cooler winter months.



Our exclusive linear louvre design is architectural in design & delivers a clear view through the louvres in the open position. They offer complete protection from the rain when in the closed position. Enjoy the experience of controlling your Alumax Opening Louvred Roof from your smartphone and maximise the benefits they provide, such as natural light, privacy & complete weather protection.

	195	215	225	235	255	275
Louvre Blade Visual						
Price Category	Premium	Premium	Standard	Premium	Standard	Premium
Maximum Span	3500mm	4200mm	4000mm	4600mm	4500mm	5500 mm
Width Of Louvre	195mm	215mm	225mm	235mm	255mm	275mm
Thickness Of Louvre	32mm	35mm	35mm	40mm	40mm	46mm
Open Space Between	151mm	168mm	178mm	183mm	203mm	217m
Louvre Centres	184mm	203mm	213mm	223mm	243mm	263mm
Openness Factor	85 %	86%	87%	88%	89%	90%
Max Louvres - 1 x Motor	37	34	32	31	29	26
Integrated Weather Strip	Standard	Standard	Standard	Standard	Standard	Standard
Powder Coat Options	All	All	All	All	All	All
Acoustic & Thermal Upgrade Option	Yes	Yes	Yes	Yes	Yes	Yes


Please Note: All maximum louvre spans are from outside to outside of support frame.

ALUMAX OPENING LOUVRED ROOF
LOUVRE MODEL SPECIFICATIONS



Alumax Model Highlights
225 Model | 255 Model

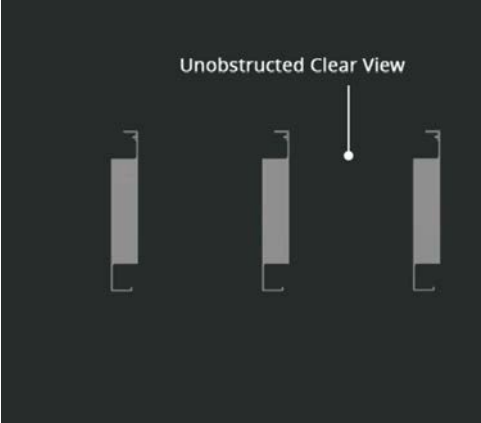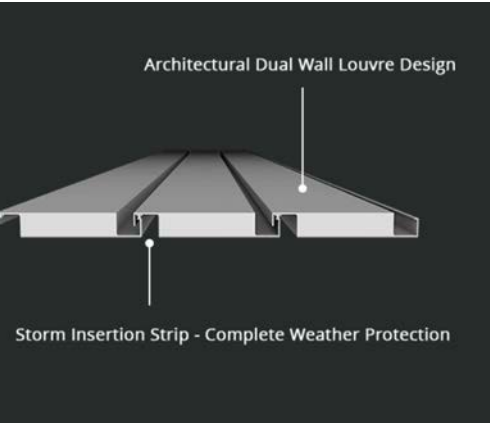

	225 Model	255 Model
Max Span	4000mm	4500mm
Dimensions	225x35mm	255x40mm
Openness	87%	89%
Between	178mm	203mm

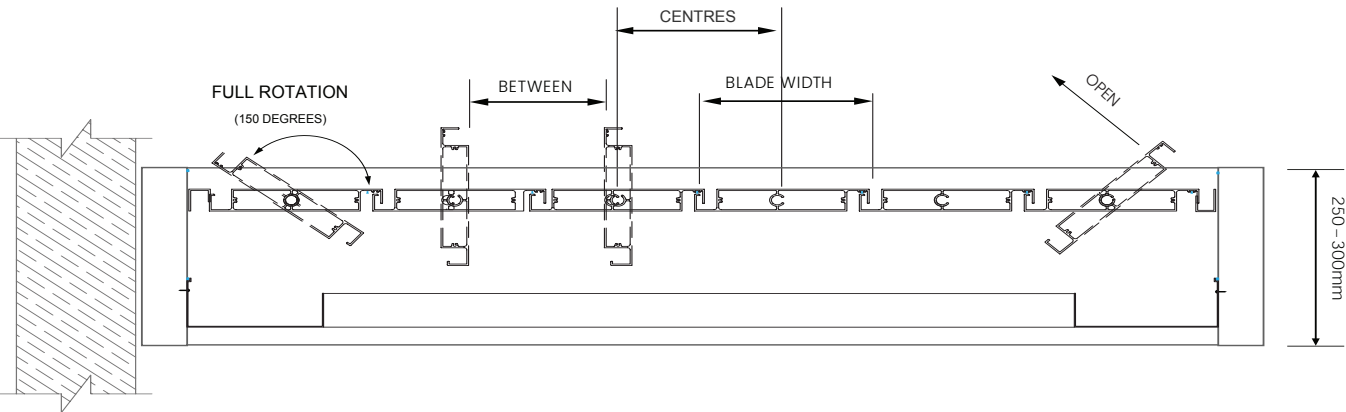

Denotes Clients Support Frame or Alumax Aluminium Support Frame

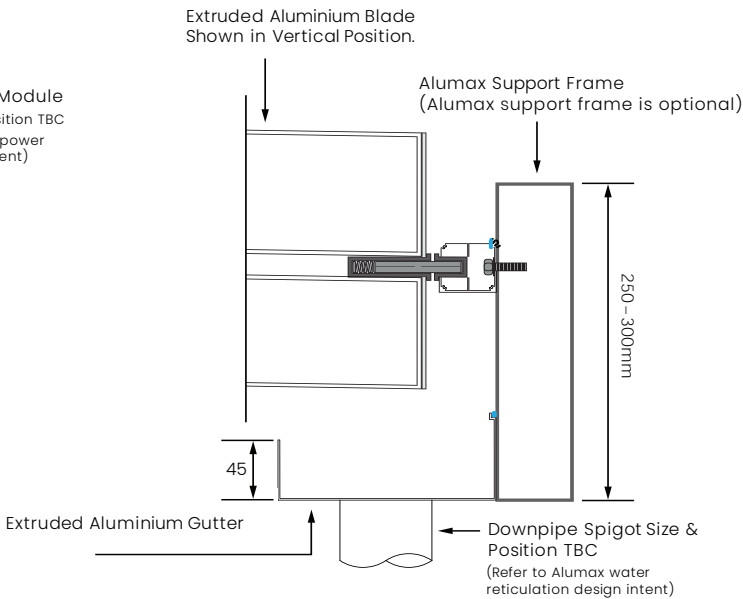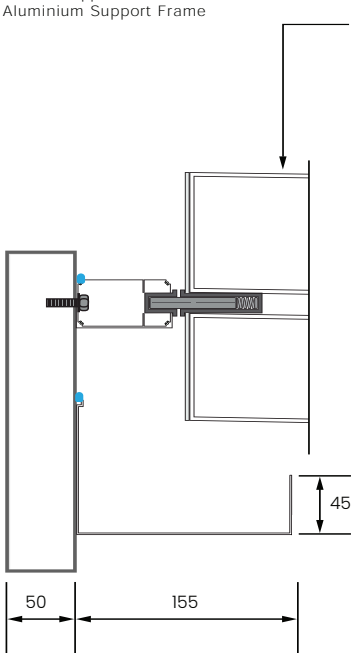

Alumax Service & Support

One of the Alumax consultants or local dealers will help you simplify the specification process, saving you time and money. We are also available to offer all the right care & maintenance advice for your product.

Australia Wide

Call 1300 258 629 or visit
www.alumax.com.au

